



CANT STRIP, TAPERED INSULATION & MORE



1.800.843.0317
UnitedAsphalt.com/tapered

Manufactured by:
United Asphalt Company
P.O. Box 291, Cedar Brook, NJ 08018





TAPERED INSULATION

United Asphalt's Tapered Division offers a full line of tapered products in Fiberboard & Perlite Insulation. Each material is available in Cant Strip, Tapered Edge & Tapered Panel cuts.

CANT STRIP \

Our cant strip provides an angled transition from the wall to the roof surface to ensure the roofing material do not bend sharply.

DIMENSIONS	BDLS/PLT	LIN FT/BDL	LIN FT/PLT
1 1/2" x 4"	24	96'	2304'
1 1/2" x 5"	15	96'	1440'

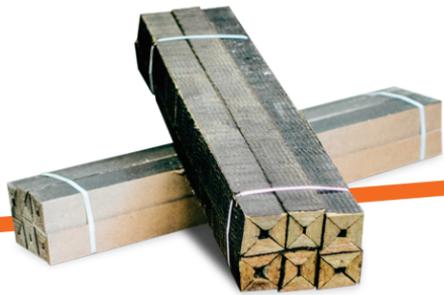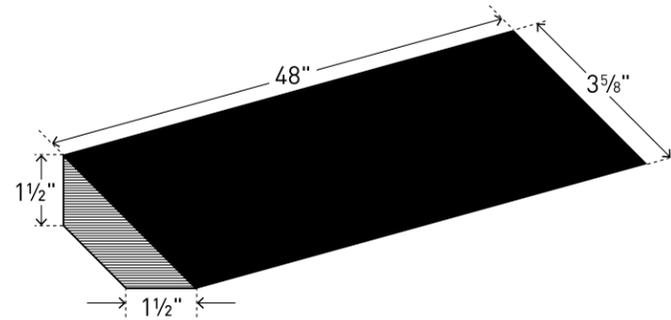

TAPERED EDGE \



Tapered Edge is used to provide positive slope on a flat roof system. This ensures proper roof drainage and slope to keep ponding water off the roof surface. Tapered Edge is also use to provide a smooth transition from Tapered Insulations to roof level.

WOOD FIBER

DIMENSIONS	BDLS/PLT	LIN FT/BDL	LIN FT/PLT
1 1/2" x 12"	16	56'	896'
1 1/2" x 18"	10	56'	560'
1 1/2" x 24"	8	48'	384'
1" x 6"	40	72'	2880'
1" x 12"	20	72'	1440'
1/2" x 6"	40	144'	5760'
1/2" x 12"	16	144'	2304'

PERLITE

DIMENSIONS	BDLS/PLT	LIN FT/BDL	LIN FT/PLT
1 1/2" x 12"	20	48'	960'
1 1/2" x 18"	12	48'	576'
1 1/2" x 24"	10	48'	480'

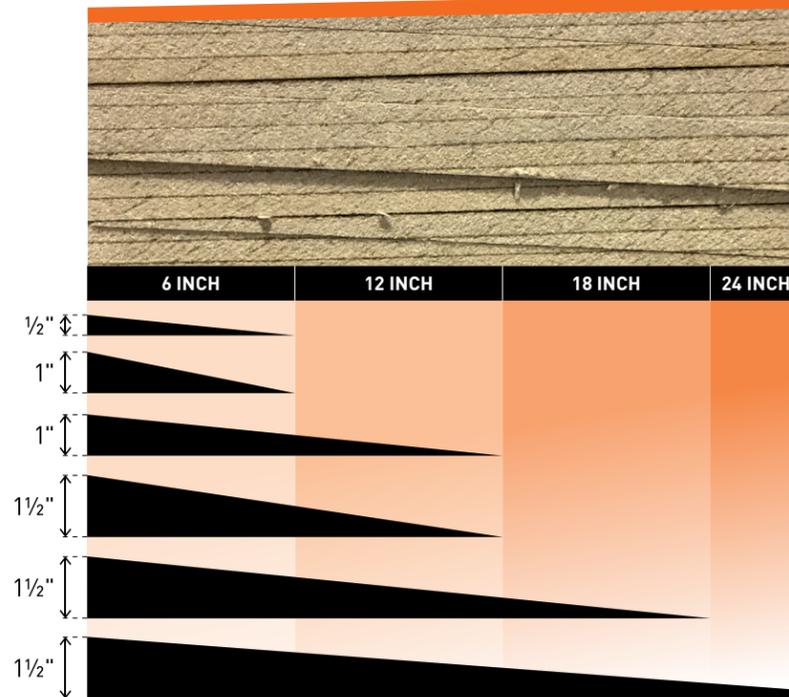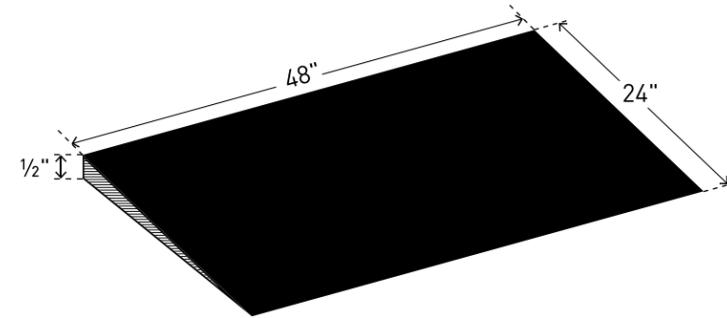

TAPERED PANEL \

United Asphalt Company has the capability to cut Tapered Panels to various sizes. Offered in 2' x 4' panels below.

1/8" INCLINE		1/4" INCLINE		1/2" INCLINE	
PANEL	SIZE	PANEL	SIZE	PANEL	SIZE
A8	1/4" - 1/2"	A4	1/4" - 3/4"	A4	1/4" - 3/4"
B8	1/4" - 3/4"	B4	3/4" - 1 1/4"	B4	3/4" - 1 1/4"
C8	3/4" - 1"	C4	1 1/4" - 1 3/4"	C4	1 1/4" - 1 3/4"
D8	1" - 1 1/4"	D4	1 3/4" - 2 1/4"	D4	1 3/4" - 2 1/4"

ALSO AVAILABLE IN
4' x 4' PANELS!



ROOF SUMPS \

United Tapered Sumps are pre-cut tapered panels that are installed around the center of the drain, to provide positive slope around the drain area. This positive slope eliminates ponding water that shortens the lifespan of a roof surface and puts unnecessary strain on the roof structure.

FEATURES

DIMENSIONS	HEIGHT AT PERIMETER	HEIGHT AT CENTER	PIECES PER KIT
4' x 4'	1"	0"	8



INSULATION SPECIFICATIONS

WOOD FIBERED SPECIFICATIONS \

Conforms to ASTM C 208

Features/Benefits

- ▶ Dimensionally stable
- ▶ Environmentally friendly, 100% recyclable
- ▶ May contribute to LEED credits
- ▶ Cuts with a knife

May help contribute to LEED credits:

- ▶ **MR Credit 4:** Recycled Content
- ▶ **MR Credit 5:** Regional Materials
- ▶ **MR Credit 6:** Rapidly Renewable Materials
- ▶ **IEQ Credit 4.4:** Low-Emitting Materials - Composite Wood and Agrifiber Products

PERLITE SPECIFICATIONS \

Conforms to ASTM Standard C728
UL Flame Spread Rating 25

Features/Benefits

- ▶ 25% post-consumer recycled content and comply with the Environmental Protection Agency Regulation 40 CFR Part 248

May help contribute to LEED credits:

- ▶ **MR Credit 4:** Recycled Content
- ▶ **MR Credit 5:** Regional Materials

LEARN MORE  UnitedAsphalt.com/tapered



**PART OF OUR
COMPLETE CATALOG OF
ROOFING PRODUCTS!**

THE RIGHT PRODUCTS FOR THE JOB



**LIQUID MEMBRANE SYSTEMS
QUICK PRODUCT GUIDE**



**REPAIR, MAINTENANCE
& RESTORATION
ROOF CEMENTS, COATINGS & MORE!**



**HAVE QUESTIONS?
WANT HELP CHOOSING?**



SCAN HERE
GET IN TOUCH WITH YOUR LOCAL REP